




GOOLOO[®]
ALWAYS GOOD TO GO

User Manual

3000A | **GT3000**
JUMP STARTER

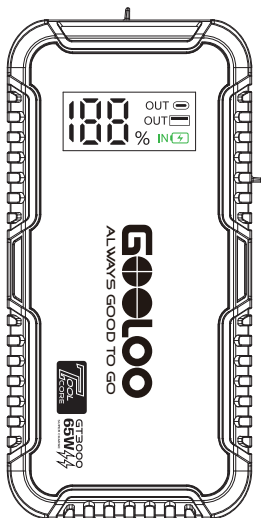

SUPERSAFE[®] is a safety protection technology by **GOOLOO**[®]

Model: JS-590



Thank you for choosing the GOOLOO jump starter.

To ensure a safe and satisfying experience, please read this manual carefully before use.

It contains important safety guidelines and operating instructions.

We highly recommend keeping this manual for future reference.



Charge It First !

While reviewing this manual, you can begin charging GT3000 using the included USB-C cable and a compatible wall charger.

Note: Wall charger not included



Warning

This unit is designed exclusively for 12V vehicles or equipment. Using it with incompatible battery systems can be hazardous.




Before using the jump starter, carefully review all safety information provided.

Failure to follow safety guidelines may result in:

- **Damage to the unit**
- **Electric shock**
- **Fire or explosion**
- **Property damage**
- **Personal injury**



Parts and Function Description

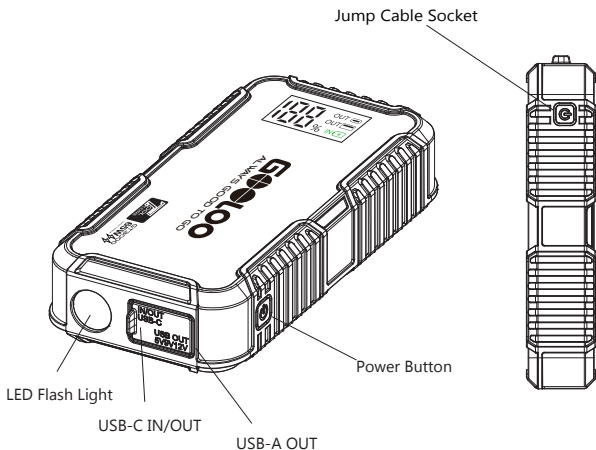



Package Content

#	Part Name	Quantity
1	Host	1
2	Smart Jumper Cable	1
3	USB-A to USB-C Cable	1
4	Carrying Bag	1
5	User Manual	1

Technical Specification

Capacity	44.4Wh/3000mAh,14.8V
Starting Current	400A
Peak Current	3000A
USB-C In/Out	PD65W MAX(5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A)
USB-A Out	18W MAX(5V/3A,9V/2A,12V/1.5A)
Operating Temp	-4°F ~ 131°F
Lifetime	>1000 Cycles
Full Charge Time	0.8h (65W Charger)
Size	6.97×3.43×1.50in
Weight	1.32lb



Display Screen Instructions

Battery Power:


Press the power button and the remaining power will be displayed as an exact percentage (e.g., 25%, 50%, 75%, 100%) on the screen.



During charging, the battery icon will blink dynamically to indicate that charging is in progress. Once charging is complete, it will show 100% and remain solid. If you use this jump starter to charge other electronic devices, "OUT  " or "OUT  " will appear on the display.



To charge the GT3000, use the included USB-C cable with a compatible wall charger.

Note: Wall charger is not included.

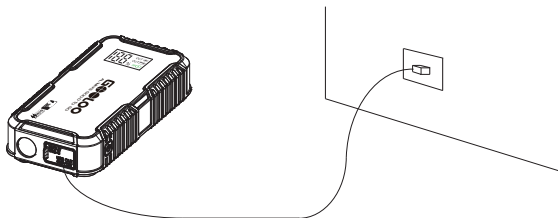

How to Start a 12V Vehicle

Note: Do not press the "BOOST" button on the jumper cable before connecting the vehicle battery correctly

- 01**  Insert the blue end of the battery clip into the jump starter socket
- 02**  Ensure the clips are correctly fastened to the corresponding terminals on the vehicle's battery
- 03**  Start the car engine



Check the LED indicator on the jumper cable and follow the instructions as below:

LED Indicator	Operation
Green LED (solid)	Proper connection detected. You can start the vehicle immediately.
Red LED	Reverse polarity detected. Please check that the battery clamps are connected to the correct terminals.
Green LED (blinking)	The vehicle battery voltage is too low. Press the "BOOST" button on the jumper cable. Once the Green LED turns solid, start the vehicle within 30 seconds.
No Light	The vehicle battery may be damaged. First, ensure the clamps are connected correctly. Then press the "BOOST" button. When the Green LED turns solid, start the vehicle within 30 seconds.

If you encounter any persistent issues, we recommend discontinuing the use of the jump starter and contacting our service team directly at **fiona@gooloo.com (for the US)/support.eu@gooloo.com (for the EU)** Rest assured we will make every effort to resolve the problem within 24 hours.



Product Highlights

Powerful Jump Starter - The 3000-amp jump starter battery pack provides an instant restart for vehicles with dead 12V batteries and is compatible with gasoline engines up to 8.5L and diesel engines up to 6L. Even if the battery voltage is extremely low, simply press the "BOOST" button to forcefully jump start your car. With over 1000+ charge cycles, it is built to withstand extreme weather conditions ranging from -4°F to 131°F.

65W Max Two-Way Fast Charging - Only takes 0.8 hours to fully charge the car battery charger jump starter from 0% to 100%. You can use your own fast-charging charger to charge this jump starter through the type-c port.

3 IN 1 Jump Starter - Not only a car battery jump starter pack, but also a portable power bank and a LED flashlight. Compatible with USB devices such as smartphones and tablets.

All-Around Defense - Incorporating a high-efficiency battery management system (BMS), this device offers 10 key protections, including short circuit protection, overcurrent protection, reverse connection protection, overheating protection, and overcharge protection.

18 Months Warranty - We offer a warranty period of 18 months as per our commitment. Package Including: 1 X jump starter, 1 X smart jumper cable, 1 X USB-A to USB-C cable, 1 X carrying bag, 1 X user manual.



How to Turn the LED Flashlight On/Off

To activate the LED light, briefly press the lighting button. The white light will stay on continuously.

Pressing the button again will cycle through the following modes:

Normal→Burst Flash→SOS Signal→OFF

How to Turn the Unit On and Off

To turn the unit on, press and hold the Power button for 2 seconds.

To turn it off, press and hold the Power button again for 2 seconds.

The device will automatically power off after 90 seconds of inactivity.

Toxic and Hazardous Substances Declaration

Composition and amount of toxic or harmful substance in this product

Pb	Hg	Cd	Cr(Vi)
0	0	0	0
PBB	PBDE		
0	0		

0: Indicate that the content of harmful substances in all homogeneous materials is all lower than the prescribed limit of MCV (the standard 2002/95/EC/RoHs)



FAQ

Q1: What is the operating temperature of this unit and how should it be stored?

A: This unit contains a lithium polymer battery with an operating temperature range of -20°C to 55°C (-4°F to 131°F). If ambient temperatures exceed 60°C (140°F), internal battery damage, swelling, or safety risks may occur. To prevent damage, avoid storing the unit in a hot vehicle for extended periods.

Q2: How do I start a vehicle using this unit?

A: Please refer to the section "How to start a 12V vehicle" in this manual for detailed instructions.

Q3: How do I know if this unit is properly connected to the vehicle?

A: After connecting the clamps to the vehicle battery, check the LED on the jumper cable. A solid green light means the connection is correct. A solid red light indicates reverse polarity.



Q4: What should I do if the unit doesn't start the vehicle?

A: First, fully recharge the unit. Then reconnect the clamps and press the BOOST button. If the green LED turns solid, attempt to start the vehicle within 30 seconds. If the issue persists, contact us: **US Support: fiona@gooloo.com/EU Support: support.eu@gooloo.com** Include your order ID when reaching out.

Q5: What should I do if the unit doesn't charge?

A: Charge the unit using a USB-C cable and a wall charger overnight. If it still doesn't charge, contact us at: **US Support: fiona@gooloo.com/ EU Support: support.eu@gooloo.com**

Q6: What if this unit can't charge other devices?

A: Try using a different charging cable. If it works, the included cable may be faulty—we'll replace it. If the issue continues with another cable, please contact us: **US Support: fiona@gooloo.com/EU Support: support.eu@gooloo.com** Be sure to include your order ID.



Q7: Can this unit charge other devices while being charged?

A: Yes.

Q8: Can this unit charge other devices while jump-starting a vehicle?

A: No.

Q9: How often should I recharge the unit?

A: We recommend recharging the unit every 3 months to maintain optimal battery health.

Q10: Why does the unit shut off in 30 seconds when charging other devices?

A: The unit requires a minimum load of 200mA. Devices like smartwatches or earbuds that draw less current may cause the unit to shut off. If the current remains below 200mA, the unit will automatically power off after 90 seconds.



Warning

1. Read this user manual carefully before operating the device.
2. Use caution while handling this unit. Improper use may cause injury or damage to your vehicle or equipment.
3. Do not allow untrained individuals to operate this unit without supervision.
4. This unit is not a toy. Keep it out of reach of children.
5. This product is designed for vehicles with 12V batteries only. Do not use with non-12V vehicles or on aircraft, ships, or other equipment.
6. Do not use the unit if any cable, clamp, or connector is damaged, or if the device appears swollen, overheated or leaking.
7. Do not use the unit as a car battery or a standalone battery charger.
8. Do not attempt to jump-start a vehicle while the unit is charging.
9. Only use the supplied clamps for jump-starting and a certified charger for recharging.
10. Do not allow the battery to fully discharge. Recharge every 3 months for optimal performance.



11. Ensure the blue plug on the jumper cable is fully inserted into the output port. Loose connections may cause melting.
12. Clean the vehicle's battery terminals before connecting. Dirty or corroded terminals may reduce performance.
13. Do not start the engine more than three times consecutively. Allow 2 minutes between attempts to prevent overheating.
14. Do not reverse the clamp connection after pressing the BOOST button.
15. Only use the unit to jump-start the vehicle when its battery level exceeds 2 bars.
16. After jump-starting, wait at least 30 minutes before recharging the unit.
17. Do not submerge the unit in water.
18. Do not use the device in explosive or flammable environments (e.g., near gasoline, gas vapors, or dust).
19. Do not disassemble or modify the unit. Repairs must be performed by qualified service technicians
20. Keep the unit away from fire and extreme heat.



21. Do not drop or crush the device. If damaged, have it inspected by a certified technician.
22. Do not store the device in areas where temperatures exceed 140°F.
23. Only charge at ambient temperatures between 32°F to 131°F.
24. Under extreme conditions, battery leakage may occur. Do not touch leaking material with bare hands.
 - If contact with skin occurs, wash the affected area with soap and water immediately. Seek medical attention if irritation develops.
 - If contact with eyes occurs, rinse thoroughly with clean water for at least 10 minutes and seek medical attention immediately.
25. This unit contains a lithium battery. At the end of its service life or in case of leakage, dispose of the device in accordance with local regulations.



Your Warranty Includes

·18-Month Online After-Sales Service

We provide timely and effective online support for any product issues within 18 months of purchase.

·30-Day Money-Back Guarantee

If you experience any product issues within 30 days of purchase, you may request a return via Amazon for a full refund.

·30 Days to 18 Months Replacement Guarantee

If the product develops a manufacturing defect between 30 days and 18 months after purchase, we will replace it with a new unit at no additional cost.

·Disclaimer

A. To obtain warranty service, the original purchaser must provide proof of purchase (order ID or receipt). Warranty coverage begins on the date of original purchase.



B. The warranty does not cover damage or malfunction caused by:

- Normal wear and tear
- Physical abuse or impact
- Improper installation
- Misuse or modification
- Unauthorized third-party repairs

C. GOOLOO is not liable for any accidental, indirect, or consequential damages arising from improper use or misuse of this product.

D. All warranty claims are limited to the repair or replacement of the defective product, at the sole discretion of GOOLOO.



Attention



Do Not Submerge In Water



Do Not Disassemble



Do Not Drop



Avoid Extreme Temperatures



Do Not Place Near or Into Fire



Overcharge/discharge
Protection



Fuse Protection



Against-reverse
Plug



Customer Service



18 Months Limited Warranty Service



Lifetime Technical Service



Feel Free to Contact Us

fiona@gooloo.com (for the US)

support.eu@gooloo.com (for the EU)



For FAQ and More Information

www.gooloo.com



1-888-886-1805

Mon.-Fri. PST 9:00a.m.-5:00p.m.

Thank You
for Choosing Us



MADE IN CHINA